



92903020500REVA



M233 MICRO AMP +




jimdunlop.com

M233 MICRO AMP +

The Micro Amp + builds on the classic M233 with EQ controls so you can finely sculpt your boosted signal. You can dial up just as much gain as the original—up to +26dB—and for the classic Micro Amp sound, just set the Bass and Treble controls to noon. This pedal has also been upgraded with low-noise op amps—so you don't get any extra noise at super high levels—and true bypass switching.

CONTROLS

- 1 TREBLE knob cuts or boosts high frequencies
- 2 GAIN knob controls overall amount of signal boost
- 3 BASS knob cuts or boosts low frequencies
- 4 FOOTSWITCH toggles effect on/bypass (red LED indicates on)

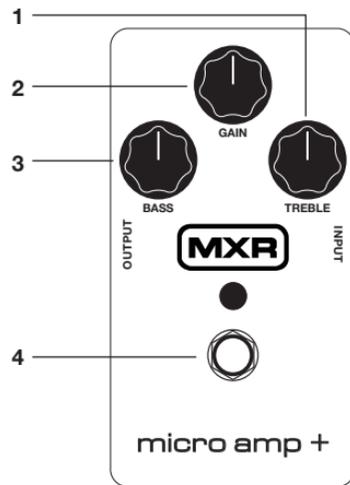

DIRECTIONS

- Run a cable from your guitar to the M233's INPUT jack and run another cable from the M233's OUTPUT jack to your amplifier.
- Start with all controls at 12 o'clock.
- Turn the effect on by depressing the footswitch.
- Rotate the GAIN knob clockwise to increase amount of signal boost or counterclockwise to decrease it.
- Rotate the BASS knob clockwise to boost low frequencies or counterclockwise to cut them.
- Rotate the TREBLE knob clockwise to boost high frequencies or counterclockwise to cut them.

POWER

The MXR Micro Amp + is powered by one 9-volt battery (remove bottom plate to install), a 9-volt AC adapter such as the Dunlop ECB003, or the DC Brick™ and Iso-Brick™ power supplies.

SPECIFICATIONS

Input Impedance	1 MΩ
Output Impedance	470 Ω
Max Output Level	+7 dBV
Noise Floor*	-87 dBV
Tone Controls	
BASS	±14 dB, 33 Hz
TREBLE	±11 dB, 8.4 kHz
Gain Control	+0.5 dB to +26 dB
Frequency Response	20 Hz to 20 kHz, ±0.75 dB
Bypass	True Hardwire
Current Draw	6.5 mA
Power Supply	9 Volts DC

*A-weighted, Gain at maximum clockwise position, Bass and Treble at mid position



DUNLOP MANUFACTURING, INC.
P.O. BOX 846 BENICIA, CA 94510 U.S.A.
TEL: 1-707-745-2722 FAX: 1-707-745-2658