



BY PRO-JECT AUDIO SYSTEMS

# INSTRUCTIONS FOR USE

## Pro-Ject Accu Box S2

Dear music lover,

Thank you for purchasing a Pro-Ject Audio Systems Accu Box S2.

In order to achieve maximum performance and reliability you should study these instructions for use carefully.



Warning of a hazard for the user, the unit or possible misuse



Important notice

## Safety instructions

AC outlet voltages vary from country to country. Before connecting to the mains, make sure that the voltage in your area meets the voltage requirements printed on the device.

Never handle the device while your hands are wet or damp. Avoid letting liquids enter the device. Never place any item containing liquid, such as a flower vase on or near the device. Never spill any liquid on the device. Never place any naked flame sources, such as lighted candles on or near the device. The product shall not be used in damp or wet locations, next to a bathtub, sink, swimming pool or any other similar conditions.




Improper handling of the product can lead to fire and explosion hazard. Do not expose the product to excessive heat. If battery acid escapes from the batteries, there is a risk of chemical burns, do not touch the product with your bare hands then. In the event of a leaking battery, be sure to wear protective gloves and remove spills with a dry, absorbent cloth.

## Using the product

Accu Box S2 is designed to power various Pro-Ject products



Make all connections whilst the unit is **switched off or disconnected from the power supply**.

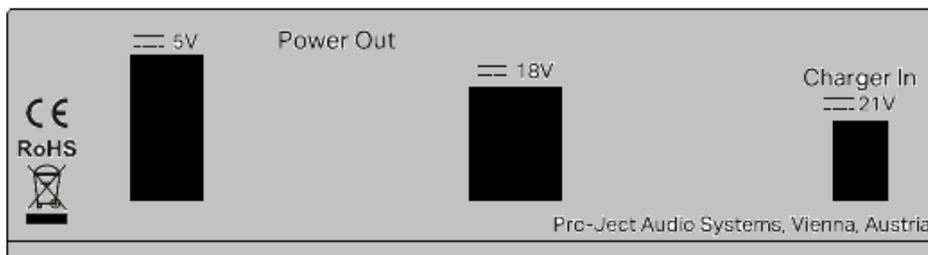

## Mains power connection

Connect the low voltage plug from the charger to the **Charger In 21V DC** socket of the unit before connecting the power supply to the mains.

## Outputs

The unit offers 2 power outputs:

**18V** is designed to power most of the Pro-Ject phono pre-amplifiers and many other products

**5V** is suitable for Pre Box S2 Digital, Head Box S2 Digital, DAC Box S2 +, Head Box S2, Tuner Box S2, Bluetooth Box S2 and possible future products.



The push **button** on the front enables or disables the backsided USB A and 2.5mm outputs. The LED above the push button lights up when the outputs are enabled.

### "Charging"

- is illuminated when batteries are charged.
- is blinking when battery status is low (20%) - charging is not in progress. If the charging is not started manually by disabling the output sockets it will start charging automatically when battery status is below 10%

"Mains" green LED is illuminated when the unit is connected to the mains.

## Technical specifications Pro-Ject Accu Box S2

Output voltage / current:	1x 18V/1A (2.5mm) 1x 5V/1A (USB A)
Capacity:	2600mAh (Li-Ion batteries)
Charging time:	3 hours (outputs disabled)
External battery charger:	21V output
Dimensions W x H x D:	103 x 37 x 106 mm
Weight:	545 g

## Service

Should you encounter a problem which you are not able to alleviate or identify despite the above information, please contact your dealer for further advice. Only when the problem cannot be resolved there should the unit be sent to the responsible distributor in your country.

## Warranty



*The manufacturer accepts no responsibility for damage caused by not adhering to these instructions for use. Modification or change to any part of the product by unauthorized persons, release the manufacturer from any liability over and above the lawful rights of the customer.*

## Copyright, trademarks

Pro-Ject Audio Systems is a Registered Trademark of H. Lichtenegger.

This guide was produced by: Pro-Ject Audio Systems  
Copyright © 2018. All rights reserved.

The information was correct at the time of going to press. The manufacturer reserves the right to make changes to the technical specification without prior notice as deemed necessary to uphold the ongoing process of technical development.